



Penrhyn Quarry, Gwynedd, Wales

Geophysical Survey Report

(Caesium Vapour Magnetic – Archaeology)

Version 1.2

Project code: PQG171

Produced for:

Andrew Josephs Associates on behalf of Welsh
Slate Limited

Authors:

MJ Roseveare, Senior Geophysicist

BSc(Hons) MSc MEAGE FGS MCIfA



4th December, 2017



Penrhyn Quarry, Gwynedd, Wales

Digital data

Item and version	Sent to	Sent date
CAD – Vector Elements 1.0	Andrew Josephs	15 th November 2017

Audit

Version	Author	Checked	Date
Interim			
1.0	MJ Roseveare	ACK Roseveare	15 th November 2017
1.1		D Lewis	29 th November 2017
1.2		D lewis	4 th December, 2017

Project metadata

Project Code	PQG171
Client	Andrew Josephs Associates on behalf of Welsh Slate Limited
Fieldwork Dates	19 th - 20 th October, 2017
Field Personnel	J Wild and T Collins
Data Processing Personnel	ACK Roseveare
Reporting Personnel	MJ Roseveare
Report Date	4th December, 2017
Report Version	1.2

TigerGeo Limited

TigerGeo Limited - Registered in England & Wales 09895326 - D-U-N-S 22-127-7456
Registered Office: 2 Wyevale Business Park, Kings Acre, Hereford, Herefordshire HR4 7BS UK
+44 (0) 1989 730 564 – www.tigergeo.com - @TigerGeoUK – also on LinkedIn & Facebook

Non-Technical Summary

A magnetic survey was commissioned by Andrew Josephs Associates on behalf of Welsh Slate Limited to prospect land at Penrhyn Quarry, Gwynedd for buried structures of archaeological interest. Survey was undertaken using a GNSS-tracked non-gradiometric pair of caesium vapour magnetometers on a hand-carried frame.

As expected the area was found to be magnetically complex with significant natural variation from within the soil. The principal discovery was of a strong anomaly typical of a hearth or similar structure within a hut circle adjacent to where a quantity of tap slag was found in a test pit. Outside the same hut an area of magnetic ground, while otherwise unexceptional for this site, might indicate the presence of waste material and especially as the slag seems to have been found very close to this.

Elsewhere a small number of linear reduced intensity anomalies suggest that buried stony banks or peaty fills may exist, perhaps additional elements of these structures.

Table of Contents

1 Introduction.....	1
2 Context.....	1
2.1 Environment.....	1
2.2 Heritage.....	2
3 Discussion.....	3
3.1 Character & Principal Results.....	3
3.1.1 Introduction.....	3
3.1.2 Data.....	3
3.1.3 Geology.....	3
3.1.4 Archaeology and land use.....	3
3.2 Catalogue	4
3.3 Conclusions.....	4
3.4 Caveats.....	4
4 Methodology.....	6
4.1 Magnetic Principles.....	6
4.1.1 Physical concepts.....	6
4.1.2 Instrumentation.....	6
4.2 Magnetic Survey.....	7
4.2.1 Technical equipment.....	7
4.2.2 Monitoring & quality assessment.....	7
4.3 Magnetic Data Processing.....	7
4.3.1 Procedure.....	7
4.4 Magnetic Interpretation	8
4.4.1 Introduction.....	8
4.4.2 The contribution from geology and soils.....	8
4.4.3 Agricultural inputs.....	8
4.4.4 Features of archaeological interest.....	8
4.5 Glossary.....	9
4.6 Selected reference.....	10
4.7 Archiving and dissemination.....	10
5 Supporting information.....	12
5.1 Standards and quality (archaeology).....	12
5.2 Key personnel	13

Drawing	Title
DWG 01	Site Location
DWG 02	Magnetic Data – Total Magnetic Intensity
DWG 03	Magnetic Data – Shallow Model
DWG 04	Interpretation
DWG 05	Interpretation - Vector

1 Introduction

TigerGeo was commissioned by Andrew Josephs Associates on behalf of Welsh Slate Limited to undertake a geophysical survey of land at Penrhyn Quarry, Gwynedd. Survey was undertaken using a hand-carried array of caesium vapour magnetometers to prospect for buried features possibly of archaeological interest and specifically to locate possible iron production activity associated with a chance find of tap slag.

Survey was undertaken across a rocky area of upland, covering an area of approximately 0.7 hectares fitted between areas of outcrop and upstanding structures as small panels of survey. The survey was completed wherever access was possible within undisturbed land of the proposed extension area.

Country	Wales
County	Gwynedd
Nearest Settlement	Bethesda
Central Co-ordinates	260900, 363848

2 Context

2.1 Environment

Soilscapes Classification	Very acid loamy upland soils with a wet peaty surface (16)
Superficial 1:50000 BGS	Till, Devensian – Diamicton (TILLD)
Bedrock 1:50000 BGS	Padarn Tuff Formation - Tuff, Felsic (PDT) and Fachwen Formation - Siltstone And Limestone, Interbedded (FA)
Topography	Upland terrain – generally descending, in terraces, to the north west
Hydrology	Natural – potential for locally wet areas
Current Land Use	Agricultural - Upland grazing
Historic Land Use	Agricultural - Upland grazing
Vegetation Cover	Grasses and upland scrub
Sources of Interference	None of significance

The upland environment is dominated by boulders probably derived from glacial activity at the end of the last Ice Age, forming a terrace on which the features of archaeological interest are located. This is orientated approximately north-east to south-west and to the north and west is unenclosed peat bog while to the south and east are rising mountain slopes.

The terrace supports a number of presumed prehistoric huts and associated enclosures. There is also evidence for a medieval hafod and separately a large multi-celled sheepfold.

The presence of Diamicton Till across the site may provide a slightly variable magnetic background, dependent upon variations in its composition and especially if the relatively high soil iron content of 4.7% recorded within the BGS G-Base data (5km resolution) is applicable to this location. The Till will likely magnetically mask the underlying Padarn Tuff and Fachwen formations although outcrops of these can be expected to alter the surface magnetic field and in ways that may be hard to predict.

In addition to the Till, laterally variable hydrology will likely influence the surface field and especially if the soil iron content is higher than about 3% which seems possible given the regional (15km) median iron content is about 2.9%. Differing aerobic and anaerobic conditions dependent upon drainage into and out of subsurface shallow geological structures will lead to variations in the ionic form of soil iron and hence its magnetic properties.

Overall, a complex magnetic environment should be expected and care needs to be taken with magnetometer configuration and interpretation.

2.2 Heritage

The area of the proposed survey contains a mix of extant stone structures and has previously been subject

to multiple archaeological investigations by the Gwynedd Archaeological Trust (GAT). These include desk-based assessment (GAT Report 837, 2009), archaeological survey (GAT Report 880, 2010) and test pit investigations (GAT Report 1423, 2018).

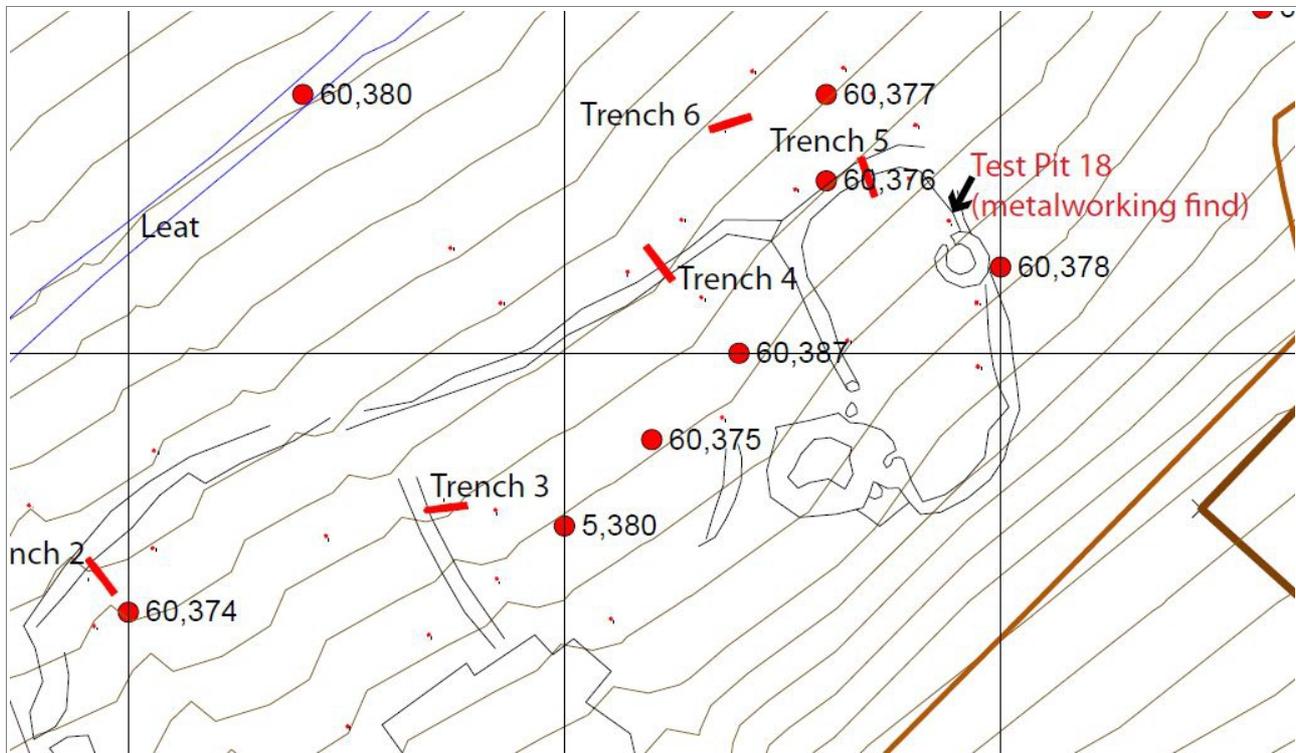


Figure 1: Extract from map supplied by the client showing supposed prehistoric structures of archaeological interest, identified by the Gwynedd Archaeological Trust (GAT)

While the desk-based assessment gathered together all previously known records of the site, in particular from the GAT Historic Environment Record (HER), the archaeological survey mapped known and previously unidentified features of archaeological interest, including five presumed prehistoric hut circles.

Limited test pits excavated at the site found very little, although Test Pit 18, shown on Figure 2 above, located close to one of the possible prehistoric hut circles, recovered four fragments of possible iron tap slag. Although the test pit excavation revealed no evidence of *in situ* industrial structures, any prehistoric metal working at the site may be considered to be of regional and possibly national significance.

3 Discussion

3.1 Character & Principal Results

3.1.1 Introduction

The following paragraphs represent an interpretive summary of the survey. The numbers in square brackets refer to individual anomalies described in detail in the catalogue below and shown on DWG 04 onwards.

3.1.2 Data

Data quality is reasonable; there is some motion noise which is inevitable given the roughness of the terrain but this has not compromised the utility of the data. Gaps in coverage are present only where survey could not physically proceed due to tall vegetation (mainly bog grasses) or areas of boulders.

Magnetic contrast is fairly high with background variation of the order of a couple of nano-Tesla and anomalies potentially of archaeological interest are of similar amplitude. It is likely that small discrete weak anomalies from features potentially of archaeological interest may not be differentiable from this background but linear ones have been recognised.

3.1.3 Geology

Strong lateral variations dominate the site and these are likely due to changes in soil depth and soil iron chemistry, these both influencing surface magnetic character. The northeast part [10] of the site is more strongly magnetic than elsewhere and this area is potentially slightly drier than further west so again changes in geochemical properties are likely.

There is a general northwest to southeast grain within the magnetic data and this may reflect long term drainage downslope, through the formation and refilling of channels and translocation of sediments.

3.1.4 Archaeology and land use

The surveyed area overlaps a series of enclosures of presumed medieval and prehistoric date and although the upstanding nature of these has tended to define individual areas of survey, there are signs within the data of other linear boundaries. These are mostly evident as reduced magnetic intensity anomalies with widths from just under a metre to just over and these would be typical of either stony banks or peaty fills within ditches. Circumstantially the former seems more likely but the data alone doesn't indicate either way.

Their form is necessarily vague against the strong background variation and it is not obvious to which phase of activity they might belong. Examples [6] and [9] seem quite thick and might relate to the presumed prehistoric enclosures but [1], [3] and [5] lack obvious association with mapped features and appear parallel to lines of boulders evident on the aerial photograph used as base mapping.

The principal result is the apparent association between the find spot of the tap slag and an area [7] of strongly elevated magnetic intensity within the round hut designated 60,378. While the survey data alone can only indicate a material or object that is intensely magnetic, the apparent association raises the possibility of this being a smelting hearth, albeit perhaps also used for domestic purposes. Likewise, by association an area [8] of more magnetic ground outside the hut and just beyond its north-facing entrance is itself not remarkable within the context of the whole survey but within its immediate location it is anomalous. It also seems to be within a metre or so of the tap slag location and therefore it is possible that the anomaly represents more of the same material. Taken together, the hut, slag and the two anomalies could suggest there was metal processing at this location.

Evidence for similar activity within the surveyed area is lacking although a smaller intense anomaly at [11] may be worth further investigation if [7] is a hearth. However, [11] lacks any of the context associated with [7] and could be caused by an iron object rather than a structure.

Whether the area [10] of large amorphous anomalies hides further industrial activity or is related to

extraction or the dumping of materials is uncertain but there are no intense discrete anomalies typical of hearths.

3.2 Catalogue

Label	Anomaly Type	Feature Type	Description
1	Reduced intensity linear	Structure	Possible stony bank or wall footing up to 0.75m wide
2	Weak enhanced intensity linear	Fill? - Ditch?	Uncertain, could be natural but cannot discount the possibility of it being a ditch fill
3	Reduced intensity linear	Structure?	One of a pair (with [4], parallel, about 4m away) of thin (< 0.5m) linear anomalies that might mark wall footings or similar stony or peat-filled structures
4	Reduced intensity linear	Structure?	See [3]
5	Weak reduced intensity linear	Natural?	Uncertain
6	Reduced intensity linear	Structure?	Possible stony bank or wall footing but may be spread. Approximately 1m wide though this is uncertain
7	Strong enhanced discrete	Hearth / magnetised fill?	A roughly circular very strong anomaly up to 2m across and weakly dipolar, less so than might be expected from a ferrous object. Its strength is matched by just one other anomaly that looks more typical of debris and hence this example stands out. It is within a possible hut circle so could be a hearth type structure, maybe related to iron smelting given the presence of tap slag about 5m away
8	Enhanced discrete	Fill / spread?	Although this broad and fairly amorphous type of anomaly is naturally common at this site, this particular example is more noteworthy as being outside the doorway of the hut containing [7] and is within an area devoid of similar natural sources. This could hint at a functional origin within the context of the hut, e.g. a dump of heated soil or other magnetised material This is especially pertinent given it approximately coincides with the tap slag location
9	Reduced intensity linear	Structure?	Possible stony bank or wall footing up to 1.7m wide
10	Texture	Natural?	Strong background variation, likely to be of natural origin although without more detailed work the exact mechanism of enhancement is not well known
11	Strong enhanced discrete	Debris	Uncertain

3.3 Conclusions

The survey seems to have revealed some signs of buried enclosure features, perhaps stony banks, and it is uncertain how these relate to the mapped structures and especially those of presumed prehistoric date. The chance discovery of tap slag now apparently relates to an area of raised magnetic intensity and potentially also a possible hearth within the adjacent hut circle. Between these it is tempting to suggest a location of iron production has been located, possibly of prehistoric date, although a medieval or later date can not be ruled out.

3.4 Caveats

Geophysical survey is reliant upon the detection of anomalous values and patterns in physical properties of

the ground, e.g. magnetic, electromagnetic, electrical, elastic, density and others. It does not directly detect underground features and structures and therefore the presence or absence of these within a geophysical interpretation is not a direct indicator of presence or absence in the ground. Specific points to consider are:

- some physical properties are time variant or mutually interdependent with others;
- for a buried feature to be detectable it must produce anomalous values of the physical property being measured;
- any anomaly is only as good as its contrast against background textures and noise within the data.

TigerGeo will always attempt to verify the accuracy and integrity of data it uses within a project but at all times its liability is by necessity limited to its own work and does not extend to third party data and information. Where work is undertaken to another party's specification any perceived failure of that specification to attain its objective remains the responsibility of the originator, TigerGeo meanwhile ensuring any possible shortcomings are addressed within the normal constraints upon resources.

4 Methodology

4.1 Magnetic Principles

4.1.1 Physical concepts

Magnetic survey for any purpose relies upon the generation of a clear magnetic anomaly at the surface, i.e. strong enough to be detected by instrumentation and exhibiting sufficient contrast against background variation to permit diagnostic interpretation. The anomaly itself is dependent upon the chemical properties of a particular volume of ground, its magnetic susceptibility and hence induced magnetic field, the strength of any remanent magnetisation, the shape and orientation of the volume of interest and its depth of burial. Finally the choice and configuration of measurement instrumentation will affect anomaly size and shape.

Sites present a complex mixture of these factors and for some the causative affects are not known. However, depth of burial and size are usually fairly constrained and background susceptibility can be estimated (or measured). The degree of remanent magnetisation is harder to predict and depends on both the natural magnetic properties of the soil and any chemical processes to which it has been subjected. Fortunately heat will raise the susceptibility of most soils and topsoil tends to be more magnetic than subsoil, by volume.

It is hard to draw reliable conclusions about what sort of geology is supportive of magnetic survey as there are many factors involved and in any case magnetic response can vary across geological units as well as being dependent upon post-deposition and erosional processes. In general a relatively non-magnetic parent material contrasting with a magnetisable erosion product, i.e. one which contains iron in the form of oxides and hydroxides, will allow archaeological structures to exhibit strong magnetic contrast against their surroundings and especially if the soil has been heated or subjected to certain processes of fermentation. In the absence of either, magnetic enhancement becomes entirely reliant upon the geochemistry of the soil and enhancement will often be weaker and more variable.

Analysis of the British Geological Survey (BGS) Geochemical Atlas (G-Base) for total soil iron reveals that for England and Wales 50% of the samples (the interquartile range) lie between 1.9% and 3.6% percentage iron with the median at 2.7%.

The principal magnetic iron mineral is the oxide magnetite which sometimes occurs naturally but is more often formed during the heating of soil. Subsequent cooling yields a mixture of this, non-magnetic oxide haematite and another magnetic oxide, maghaemite. Away from sources of heat, other magnetic iron minerals include the sulphides pyrite and greigite while in damp soils complex chemistry involving the hydroxides goethite and lepidocrocite can create strong magnetic anomalies. There are thus a number of different geochemical reaction pathways that can both augment and reduce the magnetic susceptibility of a soil. In addition, this susceptibility may exhibit depositional patterns unrelated to visible stratigraphy.

Most structures of archaeological interest detected by magnetic survey are fills within negative or cut features. Not all fills are magnetic and they can be more magnetic or less magnetic than the surrounding ground. In addition, it is common for fills to exhibit variable magnetic properties through their volume, basal primary silt often being more magnetic than the material above it due to the increased proportion of topsoil within it. However, a fill containing burnt soil may be much more magnetic than this primary silt and sometimes a feature that has contained standing water can produce highly magnetic silts through mechanical depositional processes (depositional remanent magnetisation, DRM).

A third structural factor in the detection of buried structures is the depth of topsoil over the feature. As fills sink, the hollow above accumulates topsoil and hence a structure can be detected not through its own magnetisation but through the locally deeper topsoil above it. The volume of soil required depends upon the magnetic susceptibility of the soil but just a few centimetres are often sufficient. Such a thin deposit can, however, easily be lost through subsequent erosion by natural factors or ploughing.

4.1.2 Instrumentation

The use of the magnetic sensors in non-gradiometric (vertical) configuration avoids measurement sensitisation to the shallowest region of the soil, allowing deeper structures, whether natural or otherwise to

be imaged within the sensitivity of the instrumentation. This also allows the detection of shallow broad variations in magnetic susceptibility that might have archaeological significance. Suppression of ambient noise and temporal trends is reduced and therefore need reduction during processing.

The theoretical slightly reduced lateral resolution inherent to using non-gradiometric sensor arrays is practically not an issue and especially if processing includes a vertical pseudo-gradient conversion. The non-gradiometric system is thus overall a more capable configuration than the short gradiometers often used for archaeological studies.

Caesium instrumentation has a greater sensitivity than fluxgate instruments, however, at the 10 Hz sampling rate used here this increase in sensitivity is limited to about one order of magnitude. Greater benefit is obtained from a better signal-to-noise ratio meaning that sub-nanoTesla measurement is more practically achieved.

The array system is designed to be non-magnetic and to contribute virtually nothing to the magnetic measurement, whether through direct interference or through motion noise.

4.2 Magnetic Survey

4.2.1 Technical equipment

Measured variable	Magnetic flux density / nT (Total Magnetic Intensity / nT after removal of regional trend)
Instrument	Array of Geometrics G858 Magmapper caesium magnetometers
Configuration	Non-gradiometric transverse array (2 sensor, hand carried)
Sensitivity	0.03 nT @ 10 Hz (manufacturer's specification)
QA Procedure	Continuous observation
Spatial resolution	1.0m between lines, 0.25m mean along line interval

4.2.2 Monitoring & quality assessment

The system continuously displays all incoming data as well as line speed and spatial data resolution per acquisition channel during survey. Rest mode system noise is therefore easy to inspect simply by pausing during survey, and the continuous display makes monitoring for quality intrinsic to the process of undertaking a survey. Rest mode test results (static test) are available from the system.

4.3 Magnetic Data Processing

4.3.1 Procedure

All data processing is minimised and limited to what is essential for the class of data being collected, e.g. reduction of orientation effects, suppression of single point defects (drop-outs or spikes) etc. The processing stream for this data is as follows:

Process	Software	Parameters
Measurement & GNSS receiver data alignment	Proprietary	
Temporal reduction, regional field suppression	Proprietary	None
Gridding	Surfer	Kriging, 0.25m x 0.25m
Smoothing	Surfer	Gaussian lowpass 3x3 data (0.75m)
Shallow component model (incl. regional field suppression)	Proprietary	3m vertical field separation

Potential field processing procedures are used where possible on gridded data from the above processing, allowing simulation of vertical gradient data, separation of deep and shallow magnetic sources, etc. The initial processing uses proprietary software developed in conjunction with the multisensor acquisition system. Gridded data is ported as data surfaces (not images) into Manifold GIS for final imaging, contouring and detailed analysis. Specialist analysis is undertaken using proprietary software.

4.4 Magnetic Interpretation

4.4.1 Introduction

Numerous sources are used in the interpretive process, which takes into account shallow geological conditions, past and present land use, drainage, weather before and during survey, topography and any previous knowledge about the site and the surrounding area. Old Ordnance Survey mapping is consulted and also older sources if available. Geological information (for the UK) is sourced only from British Geological Survey resources and aerial imagery from online sources. LiDAR data is usually sourced from the Environment Agency or other national equivalents, SAR from NASA and other topographic data from original survey.

Information from nearby surveys is consulted to inform upon local data character, variations across soils and near-surface geological contexts. Published data from other surveys may also be used if accompanied by adequate metadata.

Interpretation of magnetic data is undertaken using total intensity data, vertical pseudo-gradient and where relevant, shallow field, component models in parallel although for clarity only a subset of these may be presented in the report.

4.4.2 The contribution from geology and soils

On some sites, e.g. some gravels and alluvial contexts, there will be anomalies that can obscure those potentially of archaeological interest. They may have a strength equal to or greater than that associated with more relevant sources, e.g. ditch fills, but can normally be differentiated on the basis of anomaly form coupled with geological understanding. Where there is ambiguity, or relevance to the study, these anomalies will be included in this category.

Not all changes in geological context can be detected at the surface, directly or indirectly, but sometimes there will be a difference evident in the geophysical data that can be attributed to a change, e.g. from alluvium to tidal flat deposits, or bedrock to alluvium. In some cases the geophysical difference will not exactly coincide with the geological contact and this is especially the case across transitions in soil type.

Geophysical data varies in character across areas, due to a range of factors including soil chemistry, near surface geology, hydrology and land use past and present. These all contribute to the texture of the data, i.e. a background character against which all other anomalies are measured.

4.4.3 Agricultural inputs

Coherent linear dipolar enhancement of magnetic field strength marking ditch fills, narrow bands of more variable magnetic field or changes in apparent magnetic susceptibility, are all included within the category of former field boundaries if they correlate with those depicted on the Tithe Map or early Ordnance Survey maps. If there is no correlation then these anomaly types are not categorised as a field boundaries.

Banded variations in apparent magnetic susceptibility caused by a variable thickness of topsoil, depositional remanent magnetisation of sediments in furrows or susceptibility enhancement through heating (a by product of burning organic matter like seaweed) tend to indicate past cultivation, whether ridge-based techniques, medieval ridge and furrow or post medieval 'lazy beds'. Modern cultivation, e.g. recent ploughing, is not included.

In some cases it is possible to identify drainage networks either as ditch-fill type anomalies (typically 'Roman' drains), noisy or repeating dipolar anomalies from terracotta pipes or reduced magnetic field strength anomalies from culverts, plastic or non-reinforced concrete pipes. In all cases identification of a herring bone pattern to these is sufficient for inclusion within this category.

4.4.4 Features of archaeological interest

Any linear or discrete enhancement of magnetic field strength, usually with a dipolar character of variable strength, that cannot be categorised as a field boundary, cultivation or as having a geological origin, is classified as a fill potentially being of archaeological interest. Fills are normally earthen and include an often

invisible proportion of heated soil or topsoil that augments local magnetic field strength. Inverted anomalies are possible over non-earthen fills, e.g. those that comprise peat, sand or gravel within soil. This category is subject to the 'habitation effect' where, in the absence of other sources of magnetic material, anomaly strength will decrease away from sources of heated soil and sometimes to the extent of non-detectability.

Former enclosure ditches that contained standing water can promote enhanced volumetric magnetic susceptibility through depositional remanence and remain detectable regardless of the absence of other sources of magnetic enhancement.

Anything that cannot be interpreted as a fill tends to be a structure, or in archaeological terms, a feature. This category is secondary to fills and includes anomalies that by virtue of their character are likely to be of archaeological interest but cannot be adequately described as fills. Examples include strongly magnetic bodies lacking ferrous character that might indicate hearths or kilns. In some cases anomalies of ferrous character may be included.

On some sites the combination of plan form and anomaly character, e.g. rectilinear reduced magnetic field strength anomalies, might indicate the likely presence of masonry, robber trenches or rubble foundations. Other types of structure are only included if the evidence is unequivocal, e.g. small ring ditches with doorways and hearths. In some circumstances a less definite category may be assigned to the individual anomalies instead.

It is sometimes possible to define different areas of activity on the basis of magnetic character, e.g. texture and anomaly strength. These might indicate the presence of middens or foci within larger complexes. This category does not indicate a presence or absence of discrete anomalies of archaeological interest.

4.5 Glossary

Acronym	Type	Definition
A	Physical quantity	SI unit Amp of electric current
BGS	Organisation	British Geological Survey
CIfA	Organisation	Chartered Institute for Archaeologists
dB	Physical quantity	Decibel, unit of amplification / attenuation
DRM	Process	Depositional Remanent Magnetisation
EAGE	Organisation	European Association of Geoscientists and Engineers
EGNOS	Technology	European Geostationary Navigation Overlay Service
ERT	Technology	Electrical resistivity tomography
ETRS89	Technology	European Terrestrial Reference System (defined 1989)
ETSI	Organisation	European Telecommunications Standards Institute
EuroGPR	Organisation	European Ground Penetrating Radar Association, the trade body for GPR professionals
G-BASE	Data	British Geological Survey Geochemical Atlas
GeoSoc	Organisation	Geological Society of London, the chartered body for the geological profession
GNSS	Technology	Global Navigation Satellite System
GPR	Technology	Ground penetrating radar
GPS	Technology	Global Positioning System (US)
inversion	process	A combination of forward and backward modelling intended to construct a 2D or 3D model of the physical distribution of a variable from data measured on a 1D or 2D surface. It is fundamental to ERT survey
IP	Physical quantity	Induced polarisation (or chargeability) units mV/V or ms
m	Physical quantity	SI unit metres of distance
mbgl	Physical quantity	Metres below ground level
MHz	Physical quantity	SI unit mega-Hertz of frequency
MS	Physical quantity	Magnetic susceptibility, unitless
mS	Physical quantity	SI unit milli-Siemens of electrical conductivity
nT	Physical quantity	SI unit nano-Tesla of magnetic flux density

Acronym	Type	Definition
OFCOM	Organisation	The Office of Communications, the UK radio spectrum regulator
Ohm	Physical quantity	SI unit Ohm of electrical resistance
OS	Organisation	Ordnance Survey of Great Britain
OSGB36	Data	The OS national grid (Great Britain)
OSTN15	Technology	Current coordinate transformation from ETRS89 to OSGB36 co-ordinates
RDP	Physical quantity	Relative Dielectric Permittivity, unitless
RTK	Technology	Real Time Kinematic (correction of GNSS position from a base station)
s	Physical quantity	SI unit seconds of time
TMI	Physical quantity	Total magnetic intensity (measured flux density minus regional flux density)
TRM	Process	Thermo-Remanent Magnetisation
V	Physical quantity	SI unit Volt of electric potential
WGS84	Data	World Geodetic System (defined 1984)

4.6 Selected reference

- Aspinall, A, *et al*, 2008, "Magnetometry for Archaeologists", Geophysical Methods for Archaeology, Altamira Press
- Blakely, R J, 1996, "Potential Theory in Gravity and Magnetic Applications", Cambridge University Press
- Chartered Institute for Archaeologists, 2014 (Updated 2016), "Standard and guidance for archaeological geophysical survey" Reading
- Daniels (ed.), 2007, "Ground Penetrating Radar", 2nd edition, IET Radar, Sonar, Navigation and Avionics Series 15, IET
- David, A, *et al*, 2008, "Geophysical Survey in Archaeological Field Evaluation", English Heritage
- Gwynedd Archaeological Trust (GAT), 2018, "Quarry Realignment Project, Penyrhn Quarry, Bethesda, Gwynedd: Archaeological Evaluation and Survey" Report No. 1423
- Gaffney, C, *et al*, 2002, "Technical Note 6: The use of geophysical techniques in archaeological evaluations", Institute for Archaeologists (now CIfA)
- Milsom, J, 2003, "Field Geophysics", 3rd edition, The Geological Field Guide Series, Wiley
- Rawlins, B G *et al*, 2012, "The advanced soil geochemical atlas of England and Wales". British Geological Survey, Keyworth
- Schmidt, A, 2013, "Geophysical Data in Archaeology: A Guide to Good Practice", ADS
- Scollar, I, 1990, "Archaeological Prospecting and Remote Sensing", Topics in Remote Sensing 2, Cambridge University Press
- Tarling, D H, *et al*, (ed.), 1999, "Palaeomagnetism and Diagenesis in Sediments", Geological Society, London, Special Publications, 151
- Telford, W M, *et al*, 1990, "Applied Geophysics", 2nd Edition, Cambridge University Press
- TigerGeo, 2017 "Penrhyn Quarry, Gwynedd, Wales: Specification for geophysical survey" Unpublished

4.7 Archiving and dissemination

An archive is maintained for all projects, access to which is permitted for research purposes. Copyright and intellectual property rights are retained by TigerGeo on all material it has produced, the client having full licence to use such material as benefits their project. Where required, digital data and a copy of the report can be archived in a suitable repository, e.g. the Archaeology Data Service, in addition to our own archive.

The archive contains all survey and project data, communications, field notes, reports and other related material including copies of third party data (e.g. CAD mapping, etc.) in digital form. Many are in proprietary

formats while report components are available in PDF format.

The client will determine the distribution path for reporting, including to the end client, other contractors, local authority etc., and will determine the timetable for upload of the project report to the OASIS Grey Literature library or supply of report or data to other archiving services, taking into account end client confidentiality.

TigerGeo reserves the right to display data rendered anonymous and un-locatable on its website and in other marketing or research publications.

5 Supporting information

5.1 Standards and quality (archaeology)

TigerGeo is developing an Integrated Management System (IMS) towards ISO certification for ISO9001, ISO14001 and OHSAS18001/ISO45001 and has appointed Alan Ward of Bigfoot Services Limited as our ISO/HSE Technical Advisor. For work within the archaeological sector TigerGeo has been awarded CIfA (Chartered Institute for Archaeologists) Registered Organisation status.

A high standard of client-centred professionalism is maintained in accordance with the requirements of relevant professional bodies including the Geological Society of London (GeoSoc) and the Chartered Institute for Archaeologists (CIfA). Senior members of TigerGeo are professional members of the GeoSoc (FGS), CIfA (MCIfA & ACIfA grades) and other appropriate bodies, including the European Association of Geoscientists and Engineers (EAGE) Near Surface Division (MEAGE) and the Institute of Professional Soil Scientists (MISoilSci).

In addition TigerGeo is a member of EuroGPR and all ground penetrating and other radar work is in accordance with ETSI EG 202 730.

The management team at TigerGeo have over 30 years of combined experience of near surface geophysical project design, survey, interpretation and reporting, based across a wide range of shallow geological contexts. Added to this is the considerable experience of our lead geophysicists in a variety of commercial and academic roles. All geophysical staff have graduate and in many cases also post-graduate relevant qualifications pertaining to environmental geophysics from recognised centres of academic excellence.

During fieldwork there is always a fully qualified (to graduate or post-graduate level) supervisory geophysicist leading a team of other geophysicists and geophysical technicians, all of whom are trained and competent with the equipment they are working with. Data processing and interpretation is carried out by a suitably qualified and experienced geophysicist under the direct supervision and guidance of the Senior Geophysicist. All work is monitored and reviewed throughout by the Senior Geophysicist who will appraise all stages of a project as it progresses.

Data processing and interpretation adheres to the scientific principles of objectiveness and logical consistency. A standard set of approved external sources of information, e.g. from the British Geological Survey, the Ordnance Survey and similar sources of data, in addition to previous TigerGeo projects, guide the interpretive process. Due attention is paid to the technical constraints of method, resolution, contrast and other geophysical factors.

There is a strong culture of internal peer-review within TigerGeo, for example, all reports pass through a process of authorship, technical review and finally proof-reading before release to the client. Technical queries resulting from TigerGeo's work are reviewed by the Senior Geophysicist to ensure uniformity of response prior to implementing any edits, etc.

Work is undertaken in accordance with the high professional standards and technical competence expected by the Geological Society of London and the European Association of Geoscientists and Engineers.

All work for archaeological projects is also conducted in accordance with the following standards and guidance:


- David et al, "Geophysical Survey in Archaeological Field Evaluation", English Heritage, 2008;
- "Standard and guidance for Archaeological Geophysical survey", Chartered Institute for Archaeologists, 2014 (Updated 2016);

and TigerGeo meets with ease the requirements of English Heritage in their 2008 Guidance "Geophysical Survey in Archaeological Field Evaluation" section 2.8 entitled "Competence of survey personnel".

5.2 Key personnel


Senior Geophysicist (Quality manager)	Martin Roseveare MSc BSc(Hons) MEAGE FGS MCIfA
<p>Martin specialised (MSc) in geophysical prospection for shallow applications and since 1997 has worked in commercial geophysics. Elected a GeoSoc Fellow in 2009 he is now working towards achieving CSci. A member of the European Association of Geoscientists & Engineers, he has served on the EuroGPR and CifA GeoSIG committees and on the scientific committees of the 10th and 11th Archaeological Prospection conferences. He has reviewed papers for the EAGE Near Surface conference, was a technical reviewer of the Irish NRA geophysical guidance and is a founding member of the ISSGAP soils group. Professional interests include the application of geophysics to agriculture and the environment, e.g. groundwater and geohazards. He is also a software writer and equipment integrator with significant experience of embedded systems.</p>	
Operations Manager (Safety manager)	Anne Roseveare BEng(Hons) DIS MISoilSci
<p>On looking beyond engineering, Anne turned her attention to environmental monitoring and geophysics. She is a Member of the British Society of Soil Science (BSSS) and has specific areas of interest in soil physics & hydrology, agricultural applications and industrial sites. Amongst other contributions to the archaeological geophysics sector over the last 18 years, Anne was the founding Editor of the International Society for Archaeological Prospection (ISAP) and is a founding member of the ISSGAP soils group. Specifications, logistics, safety, data handling & analysis are integral parts of her work, though she is happily distracted by the possibilities of discovering lost cities, hillwalking and good food.</p>	
Archaeological Consultant	Daniel Lewis MA BA(Hons) ACIfA
<p>Daniel studied archaeology at the University of Nottingham and worked in field archaeology for many years, managing urban and rural fieldwork projects in and around Herefordshire. When the desk became more appealing he jumped into the world of consulting, working on small and large multi-discipline projects throughout England and Wales. At the same time, he returned to University, gaining an MA in Historic Environment Conservation. With over 15 years' experience in the heritage sector, Daniel has a diverse portfolio of skills. Here he ensures that geophysical work within the heritage sector is well grounded in the archaeology. His spare time includes much running up mountains.</p>	
Environmental Geophysicist	Kathryn Cunningham BSc(Hons) FGS
<p>Kathryn has been with TigerGeo since its inception and has undertaken over 100 surveys comprising total field magnetometry, twin probe resistivity, electrical resistance tomography, ground penetrating radar and laser-scanning. Her particular role is to ensure all aspects of fieldwork run smoothly, including site-specific paperwork, liaison, internal auditing and risk assessment. In addition she has increasing responsibilities in data processing and interpretation. She graduated with a BSc (Hons) in Applied Geology in 2015 from the University of Plymouth, is a Fellow of the Geological Society and enjoys acrobatics and sunny days.</p>	
Environmental Geophysicist	Jack Wild BSc(Hons) FGS
<p>Down to earth and a Plymouth University graduate in geology Jack entered the world of shallow geophysics with an Atkinson Leapfrog. Happiest when in the field he has undertaken geological projects Europe wide including in Sicily and the Spanish Pyrenees and closer to home has studied much of the Cornish and Devon coast. The mystery of what lies below drives his interest in the collection and interpretation of high quality data - be it from magnetometry or GPR he just cannot resist(ivity)! Jack is a Fellow of the Geological Society.</p>	
Engineering Geophysicist	Toby Collins BSc(Hons)

Toby studied a degree in Engineering Geology and Geotechnics at the Camborne School of Mines in Cornwall. Since completing this he has spent eight years working in a range of underground metalliferous mines in Australia as a Geotechnical Engineer. This covered three states and a range of precious and base metal mines. Involving everything from data collection and interpretation through to ground support design and mine sequencing \ scheduling. He has recently returned to the UK to pursue an ongoing career in geotechnics and geophysics. Outside of work he enjoys being outside, whether that be walking in the British uplands or climbing on the Cornish sea cliffs.

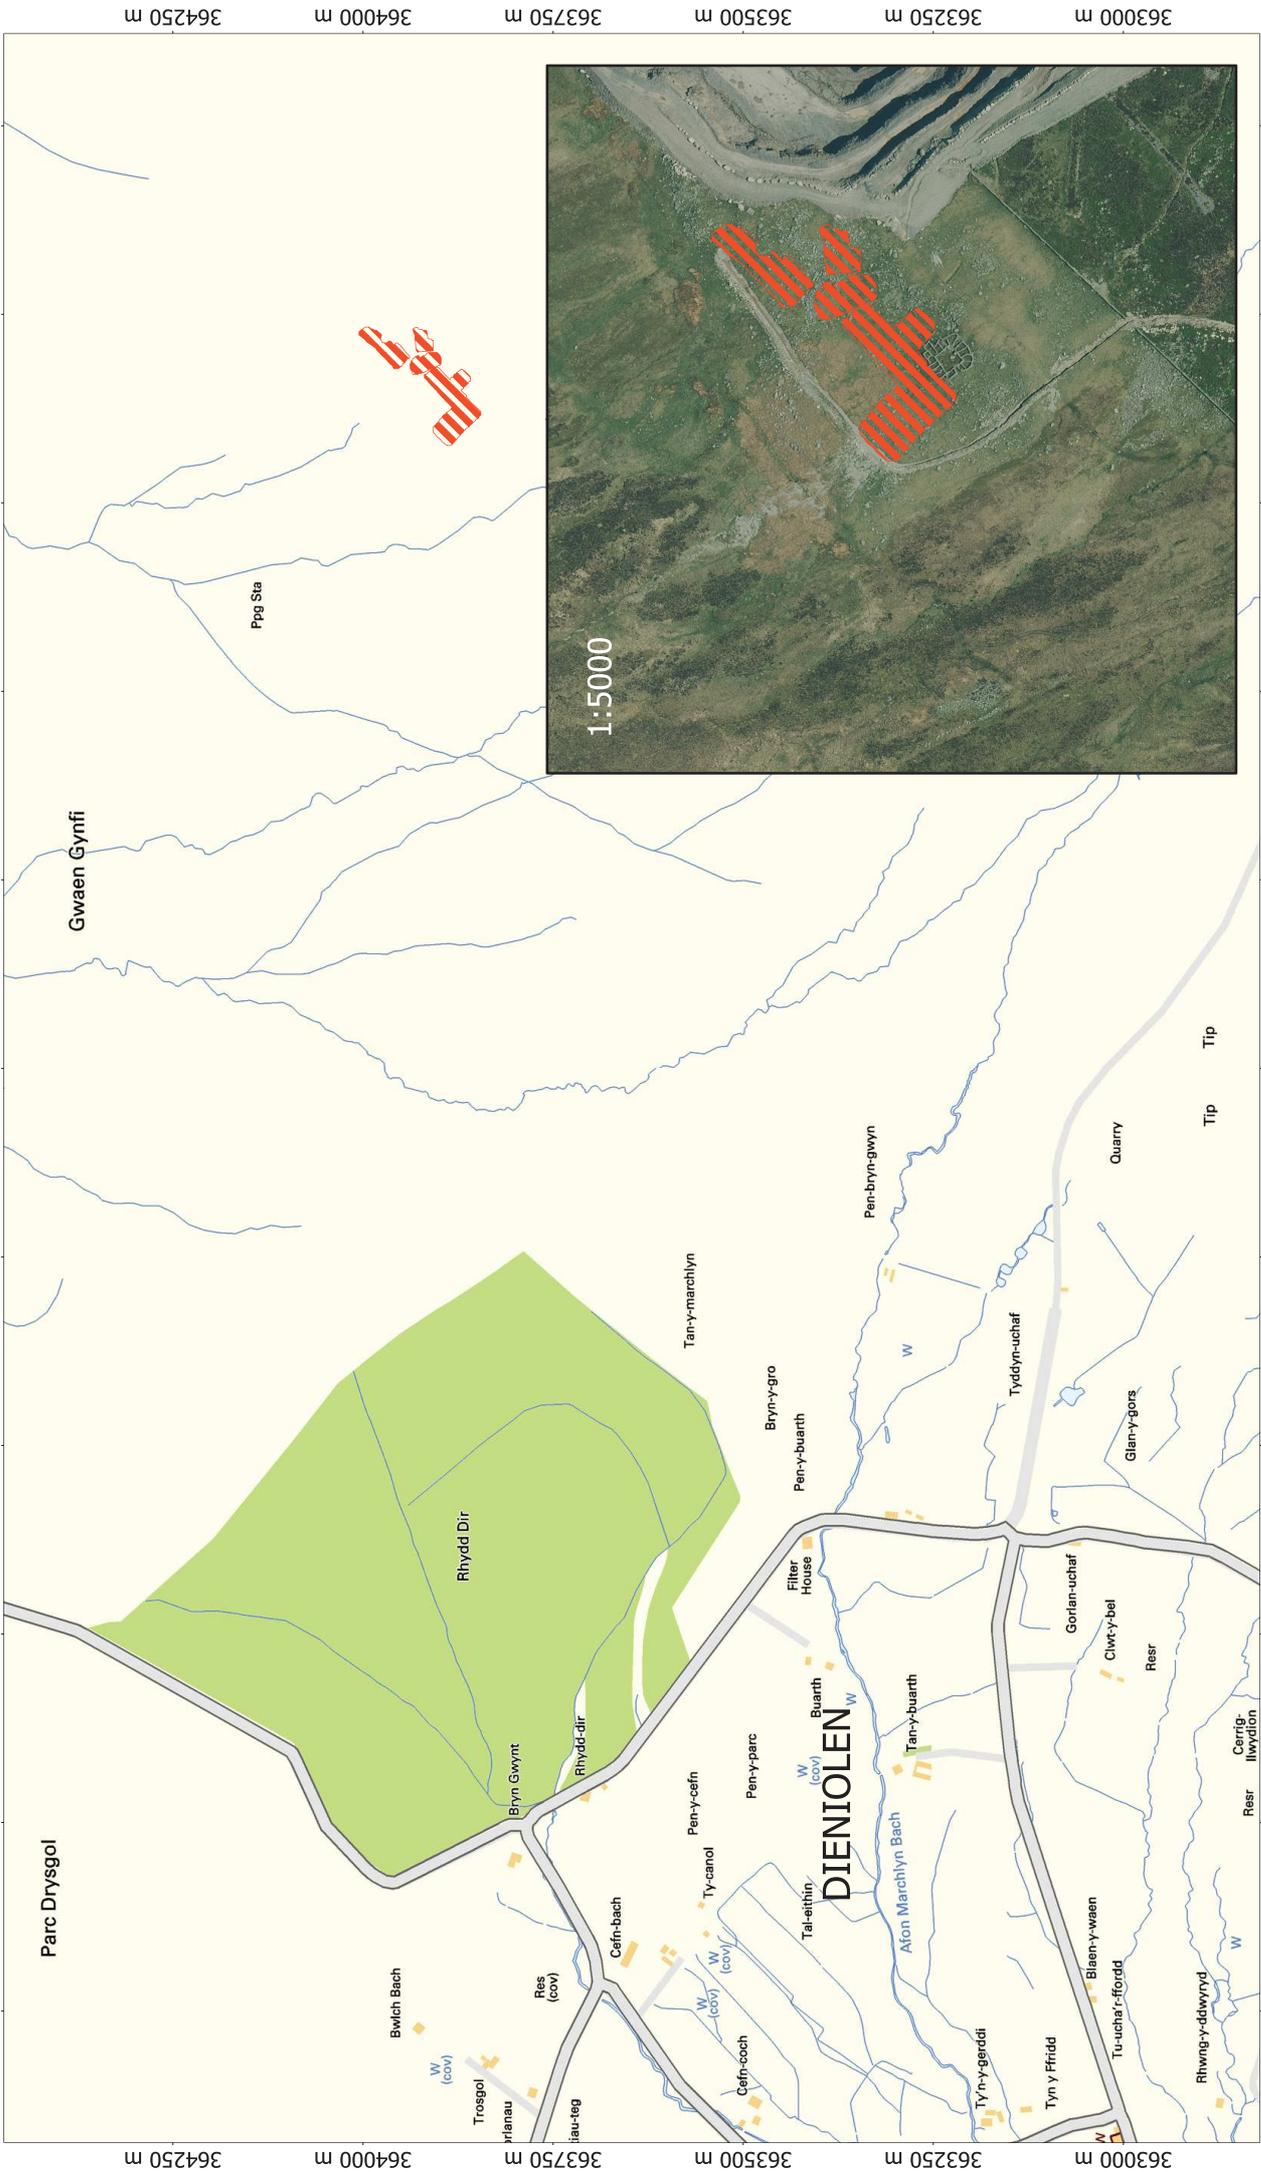

PQG171 Penrhyn Quarry, Gwynedd, Wales DWG 01 Site Location

Orthographic Scale: 1:10000 @ A4 Spatial Units: Meter. Do not scale off this drawing
File: PQG171.map Copyright TigerGeo Limited 2017 OS OpenData Crown Copyright & Database Right 2017

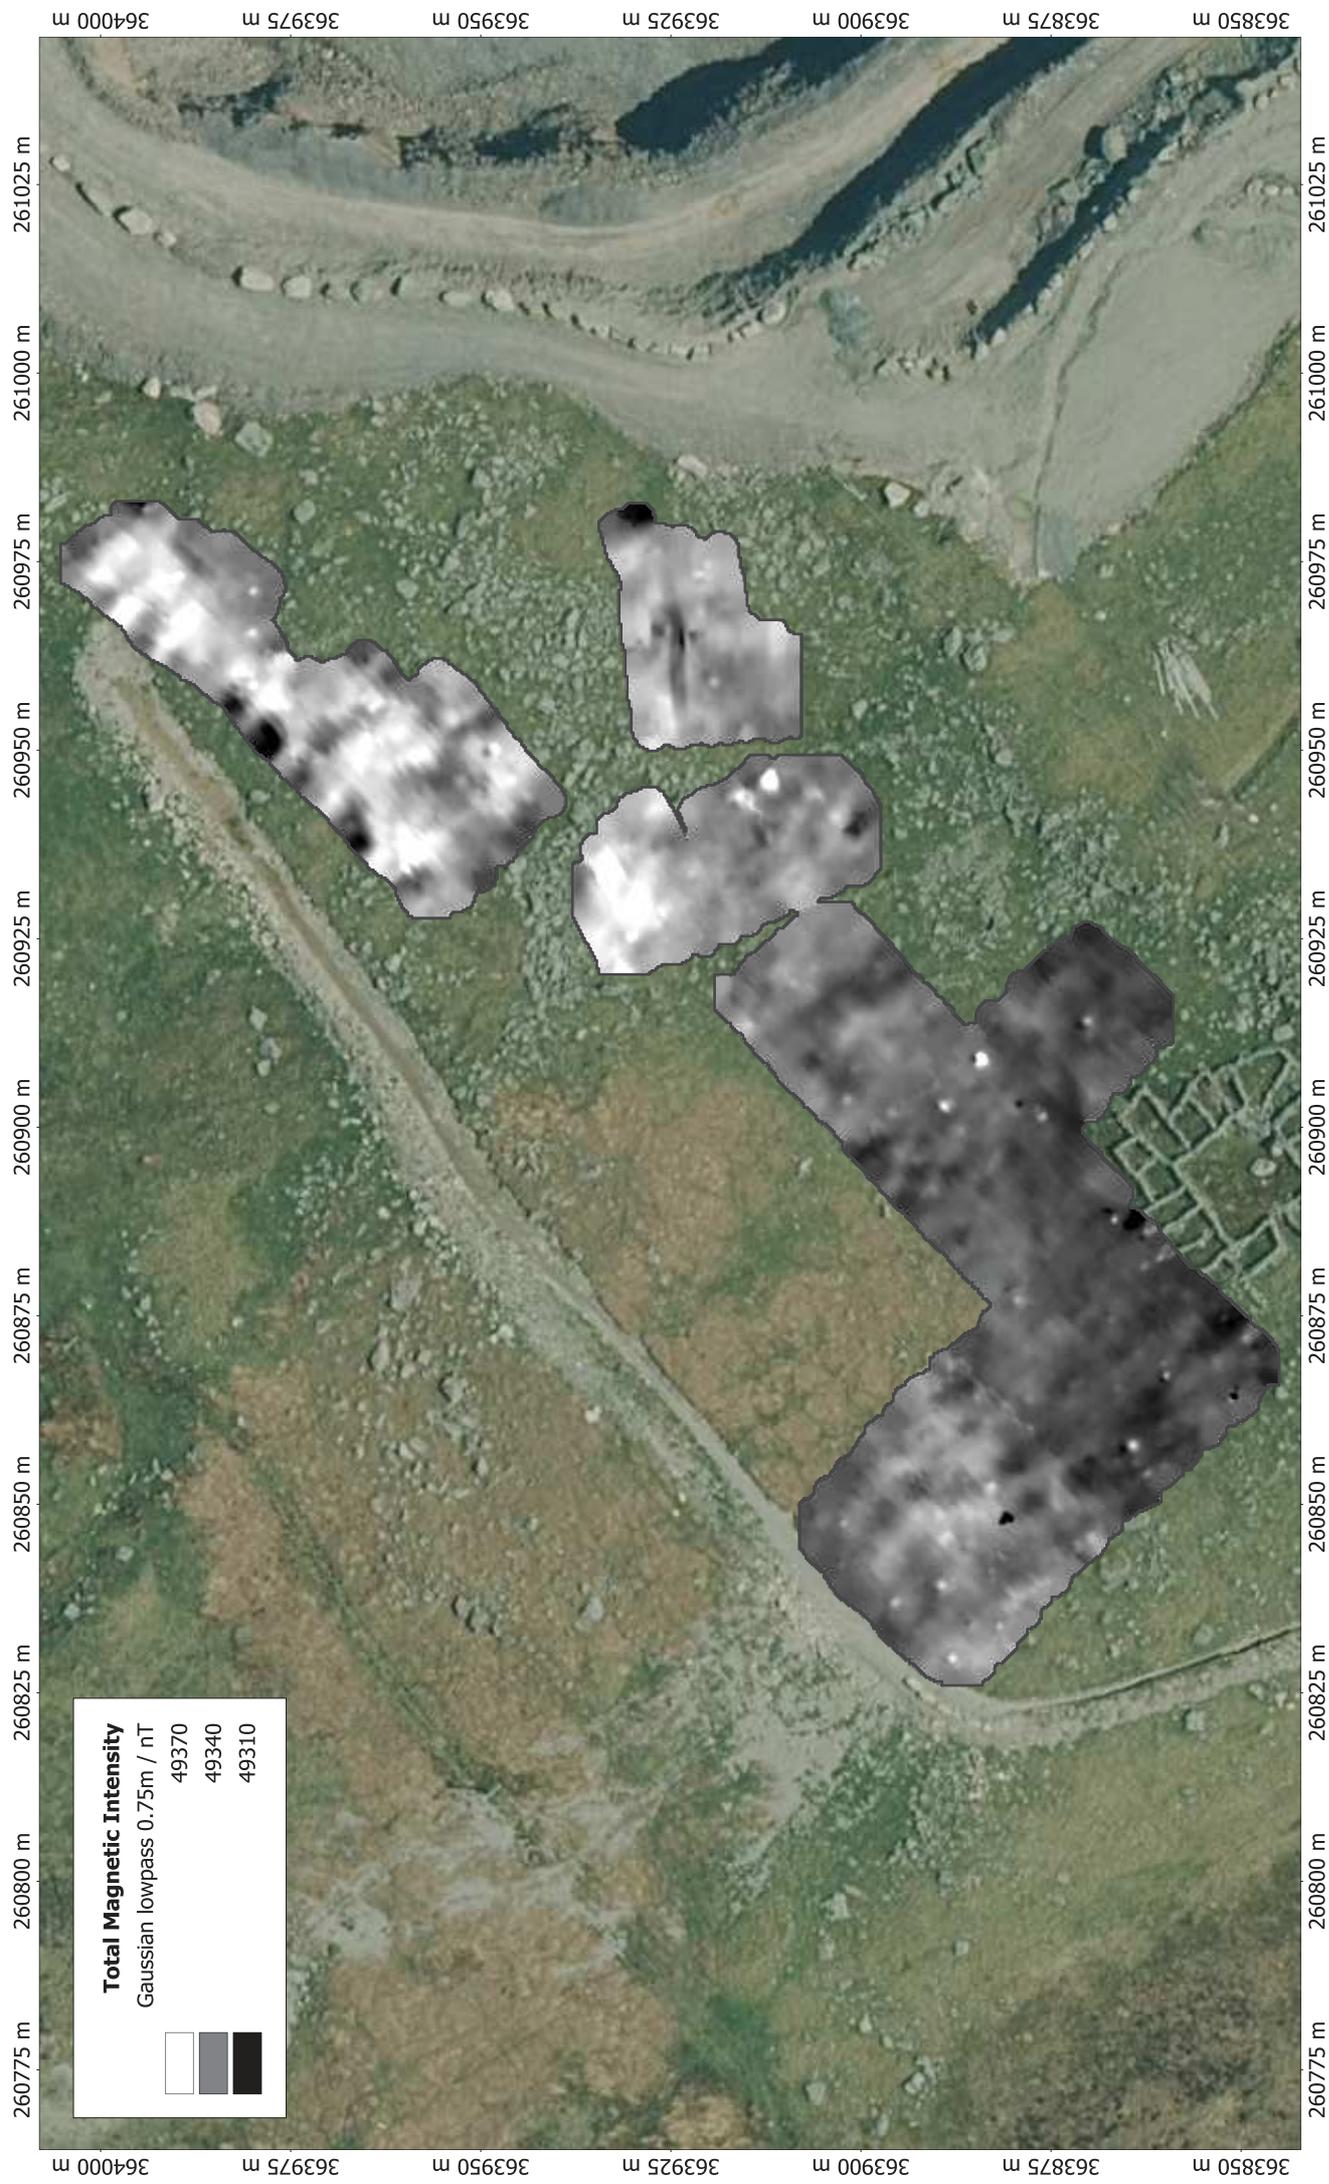


PQG171 Penrhyn Quarry, Gwynedd, Wales
DWG 02 Magnetic Data - Total Magnetic Intensity

Orthographic Scale: 1:1000 @ A4 Spatial Units: Meter. Do not scale off this drawing
File: PQG171.map Copyright TigerGeo Limited 2017




PQG171 Penrhyn Quarry, Gwynedd, Wales
DWG 03 Magnetic Data - Shallow Model

Orthographic Scale: 1:1000 @ A4 Spatial Units: Meter. Do not scale off this drawing
File: PQG171.map Copyright TigerGeo Limited 2017

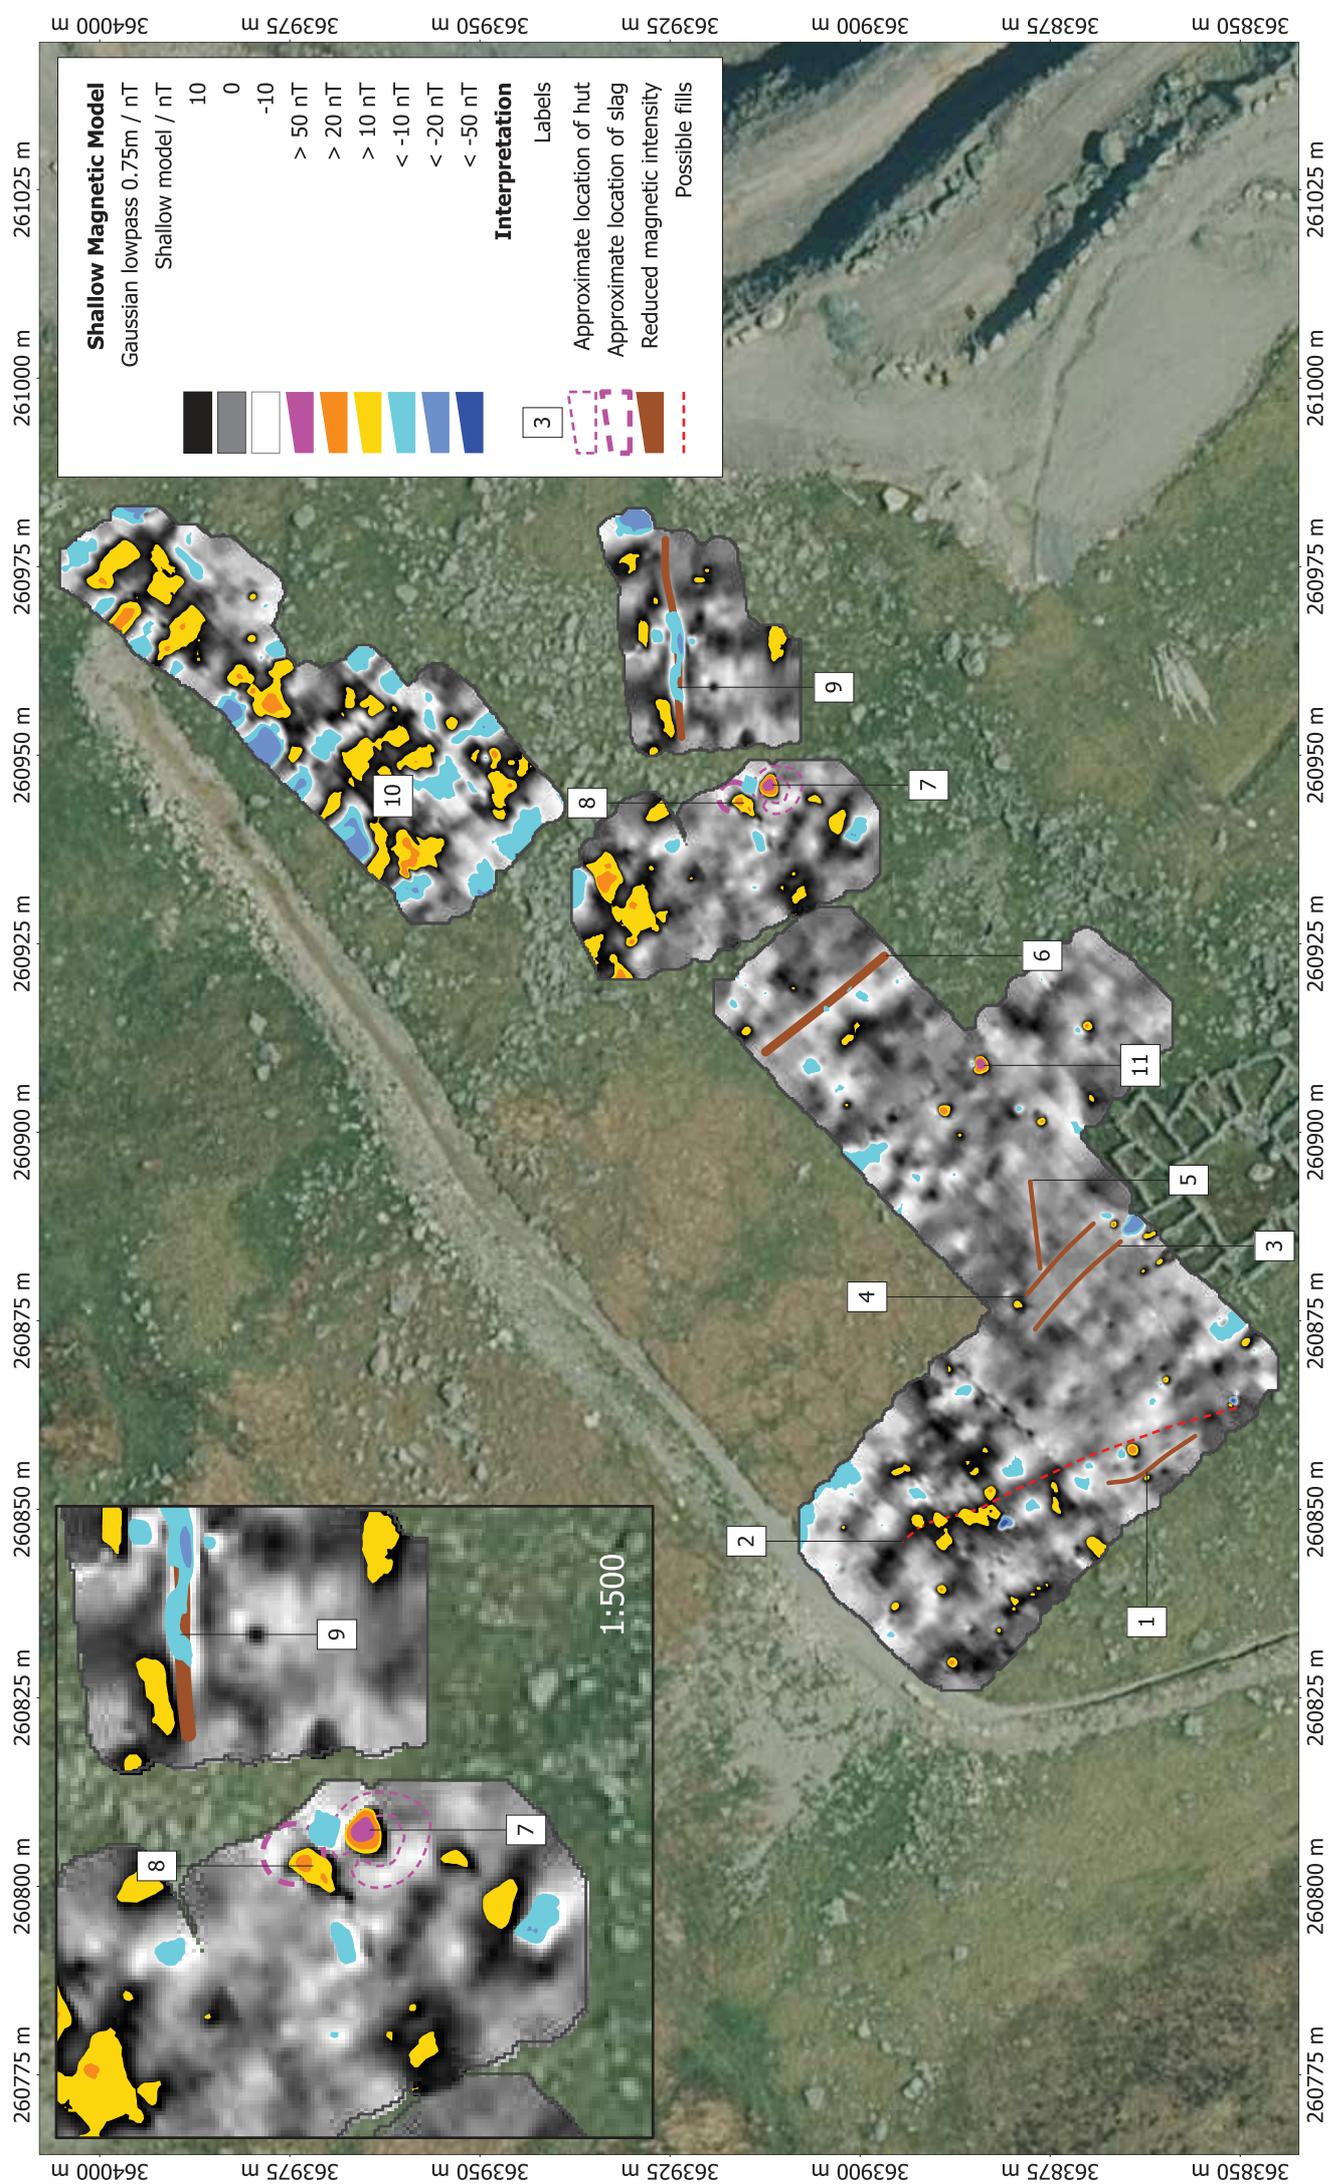

PQG171 Penrhyn Quarry, Gwynedd, Wales DWG 04 Interpretation

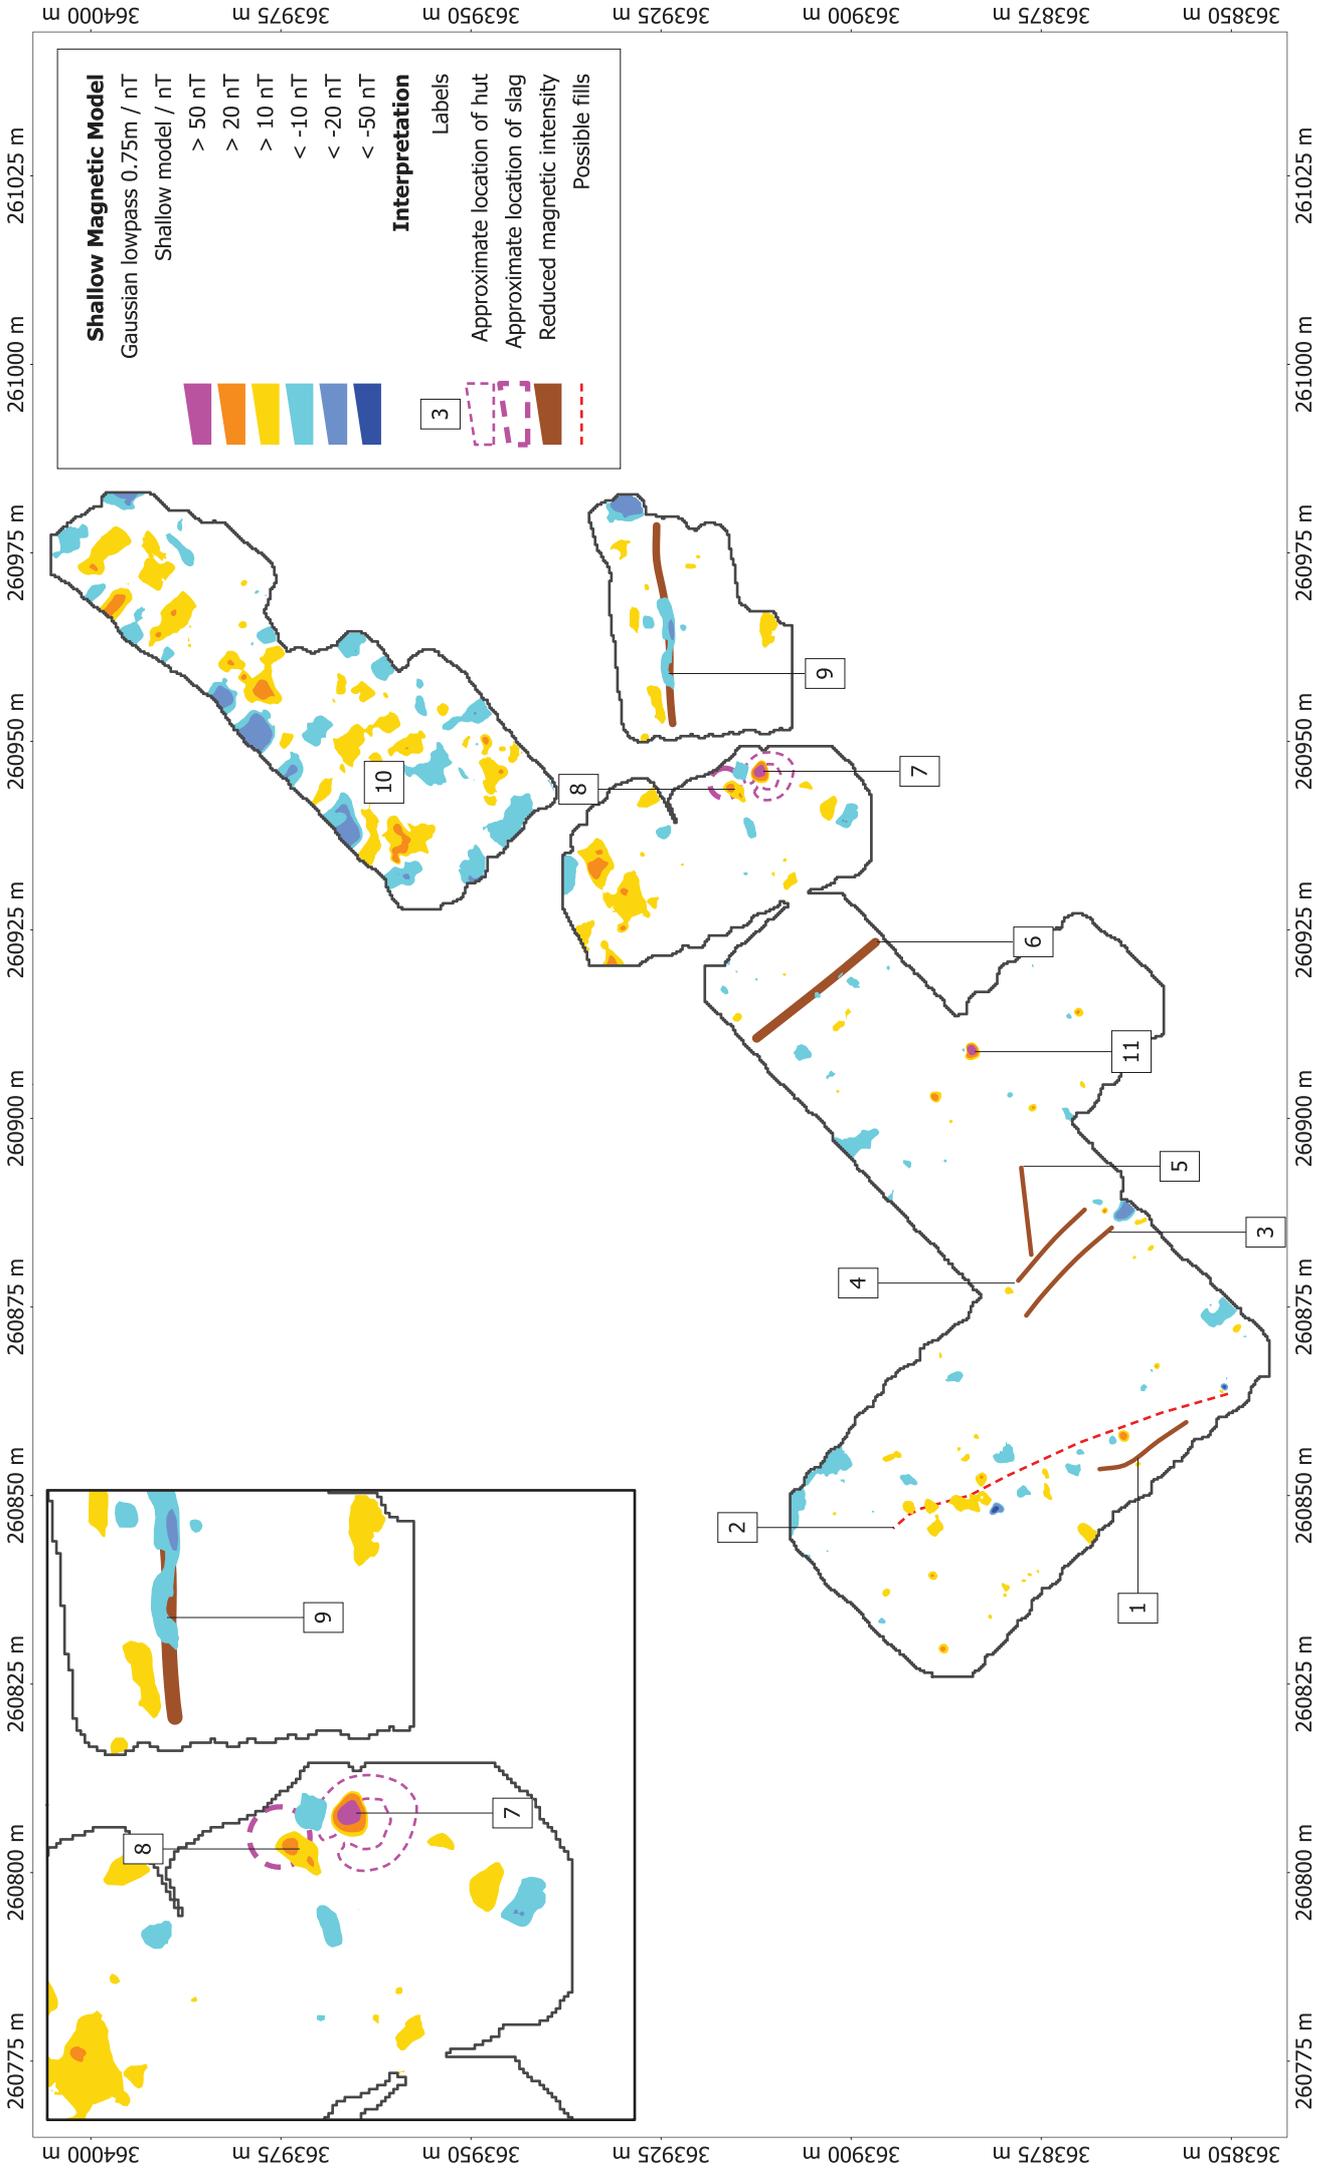

**PQG171 Penrhyn Quarry, Gwynedd, Wales
 DWG 05 Interpretation - Vector**

Orthographic Scale: 1:1000 @ A4 Spatial Units: Meter. Do not scale off this drawing
 File: PQG171.map Copyright TigerGeo Limited 2017